STUCCHI EUTRAC

### CORE5



Surface track



Surface track with champagne film



Surface track with natural film



Surface track with stainless steel film

### CORE5 covers



Surface aluminium S1 cover



Trimless aluminium S3 cover



Double track aluminium S7 cover

## CORE5 adapter



Single spot adapter

## CORE5 connections



Concealed end-feed



Double concealed end-feed



Jointing connector



Jointing connector

## CORE5 end caps



End cap



End cap for surface cover



End cap for trimless cover



End cap for double emission cover


### CORE5



**CORE5** is the first system based on CORE concept. The core is a track itself, made of a **proprietary polymer** which maintains the **mechanical and electrical features** of a standard track.

The core can be used as it is for ceiling or embedded applications, while the use of **aluminium covers** makes all the other installation types possible. Covers can be customized in colour, finishing, shape and size thus giving the maximum freedom and flexibility in all applications and **films** give an aesthetic touch to surface ones.

CORE5 main feature is the **track size which is even smaller**, thus conveying a very elegant touch to residential, retail or any other specific application where space for track installation is limited and attention to details is a must.

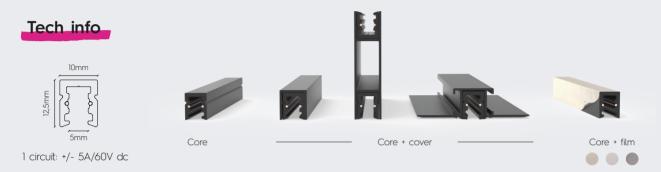

#### Materials:

Core: extruded body in black polymer

Covers: aluminium

Available cover colours: black embossed / white embossed

Available film colours: Champagne natural stainless steel

### Available lengths:

500mm 1000mm


2000mm 3

3000mm


### **CORE5** mounting options

#### WOOD SHELF:

### Ceiling




#### Embedded



#### GLASS / METAL SHELF / DRYWALL:

Ceiling



#### Inclined embedded



Side embedded



# Light inside CORE5



## SENZAFINE FLAT M5

Linear light modules for diffuse light

[mm]	n°. LED Mod	[K]	I LED	REAL FLUX [lm]	POWER [W]	CRI
345	1	2700 / 3000 / 4000	24V Constant voltage	240,7 / 251,6 / 268,2	4,3	≥90
642	2	2700 / 3000 / 4000	24V Constant voltage	481,5 / 503,3 / 536,7	8,6	≥90
938	3	2700 / 3000 / 4000	24V Constant voltage	722,3 / 755 / 804,8	12,9	≥90
1235	4	2700 / 3000 / 4000	24V Constant voltage	963,1 / 1006,7 / 1073,1	17,3	≥90




## SPOTLIGHT

A tiny luminaire to complete CORE5 system with accent light

Optic	n°. LED Mod	[K]	I LED	REAL FLUX [lm]	POWER [W]	CRI
Lens 34°	1	2700 / 3000 / 4000	24V Constant voltage	70,2 / 76,7 / 87,7	2,0	≥90



## Surface Core / Core + trimless cover

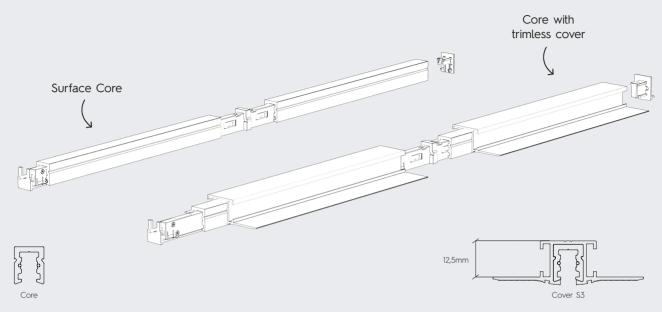



## Core + suspended double track cover

